

HCX Series

Belt Conveyors



Hutchinson Unmatched Performance

Hutchinson is committed to providing farmers with industry leading products. Hutchinson also understands that certain commodities require gentle handling to preserve the life of the seed and reduce degradation. The HCX belt conveyor series was designed for gentle handling and engineered for long-lasting durability.



HCX² Field Loaders

1500 10" TUBE | 15" BELT | CAPACITY UP TO 10,000 BU/HR | 39', 44', 49' LENGTHS AVAILABLE

The top drive field loader features a 10" tube and 15" wide belt and engineered for ease of maintenance, optimized containment and maximum speed with up to 10,000 bph*. The 2-ply chevron belt and modified hopper keep grain where it needs to be - on the belt.

EXTENDED HOPPER



10,000 bph based on HCX² 1549 equipped with mover kit and the 33 Hp EFI engine.

HCX Belt Conveyors

HCX 1535TD

HCX 1535 | 35' LENGTH | UP TO 6,000 BPH

The HCX 1535 top drive belt conveyor features an a-frame undercarriage, a 10" tube and 15" inch 2-ply chevron belt with a nylon slider back. The HCX 1535 top drive is available in electric or hydraulic.



HCX 1590 SWINGAWAY HOPPER


HCX 1590 SA

10" TUBE | 15" WIDE BELT | 90" LENGTH | UP TO 6,000 BPH

The HCX 1590 swingaway conveyor was designed to reach your bin without losing capacity or sacrificing the commodity. For added convenience, the HCX 1590 is equipped with a hydraulic swing-away to move the hopper into position and a hydraulic winch to raise and lower the hopper with ease.

FEATURES

The HCX Belt Conveyors series features; weather guards to protect the belt from outside conditions year-round, 2-ply chevron belt with a nylon slider back that works with a pinch s-drive to maintain belt tension providing maximum capacity, and a plastic hood and collapsible canvas hopper to provide excellent cushioning for fragile materials.

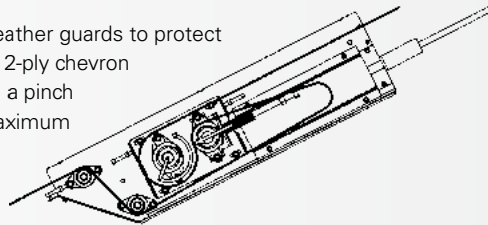

PINCH S-DRIVE

HCX Pitstop

HCX 1800 | 25' LENGTH | CAPACITY UP TO 11,000 BU/HR
HCX 2400 | 27' LENGTH | CAPACITY UP TO 18,000 BU/HR

The HCX Pitstop is a drive over hopper that allows trucks to unload without having to move the hopper once it has been positioned. The HCX Pitstop is available in electric or hydraulic drives.




HCX² 1515 Transfer Conveyor

The HCX 1515 low profile transfer conveyor is a great addition to your operation, and works with your existing conveyors for loading and unloading of trucks and bins with capacity up to 6,000 bu/hr. The HCX 1515 LP is available in electric or hydraulic drives.



HCX BELT CONVEYOR SPECIFICATIONS

MODEL	BELT LENGTH	WEIGHT LBS	UP OPERATION		DOWN OPERATION		WIDTH	HP PTO	HP ELEC	HP HYD.
			A	B	A	B				
1535TD	68' 8"	1506	16.3	11.3	10.8	12.3	7.5	N/A	5HP	5.9 (H Series)
1539 FLTD	80' 5"	1630	17	15.6	11.3	17	7.5	N/A	10HP	6.2 (2000 series)
1544 FLTD	92' 5"	1840	20.6	18.9	9.9	11.9	7.5	N/A	10HP	6.2 (2000 series)
1549 FLTD	10' 5"	1936	22.9	21.4	13.2	22	7.5	N/A	15 HP	N/A
1590	185'	3850	44.2	39.5	14.9	46.7	11.3	50 HP	25HP	6.2
1800 PITSTOP	46' 8"	2970	N/A	N/A	2.8	4.5	7.9	N/A	7.5 HP	N/A
2400 PITSTOP	45' 3"	1300	N/A	N/A	N/A	N/A	N/A	N/A	10HP	8.0 (2000 Series)
1515	30' 8"	642	N/A	N/A	2.8	6.2	3.8	N/A	5 HP	5.9

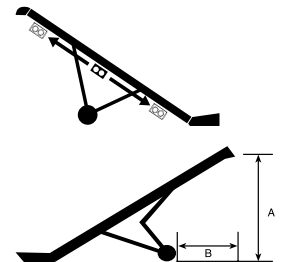

A UP IS CONVEYOR DISCHARGE HEIGHT (FROM BOTTOM OF DISCHARGE HOOD) AT 30 DEGREES | A DOWN IS OVERALL CONVEYOR HEIGHT (FROM TOP OF DISCHARGE HOOD)



Hutchinson is an AGI Brand.

AGI is a leading provider of equipment solutions for agriculture bulk commodities including seed, fertilizer, grain, and feed systems with a growing platform in providing equipment and solutions for food processing facilities. AGI has manufacturing facilities in Canada, the United States, the United Kingdom, Brazil, South Africa and Italy and distributes its products globally.

AGI HUTCHINSON

P.O. Box 629, 74, Clay Center, Kansas, USA 67432
785.632.2161 | hutchinson-mayrath.com

AGGROWTH.COM      @aggrowthintl